

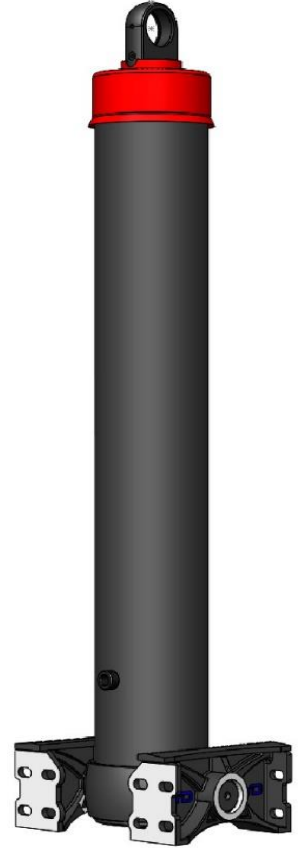


**SINGLE ACTING FRONT END CYLINDER**

**HYD 154,5-4-4440 C**

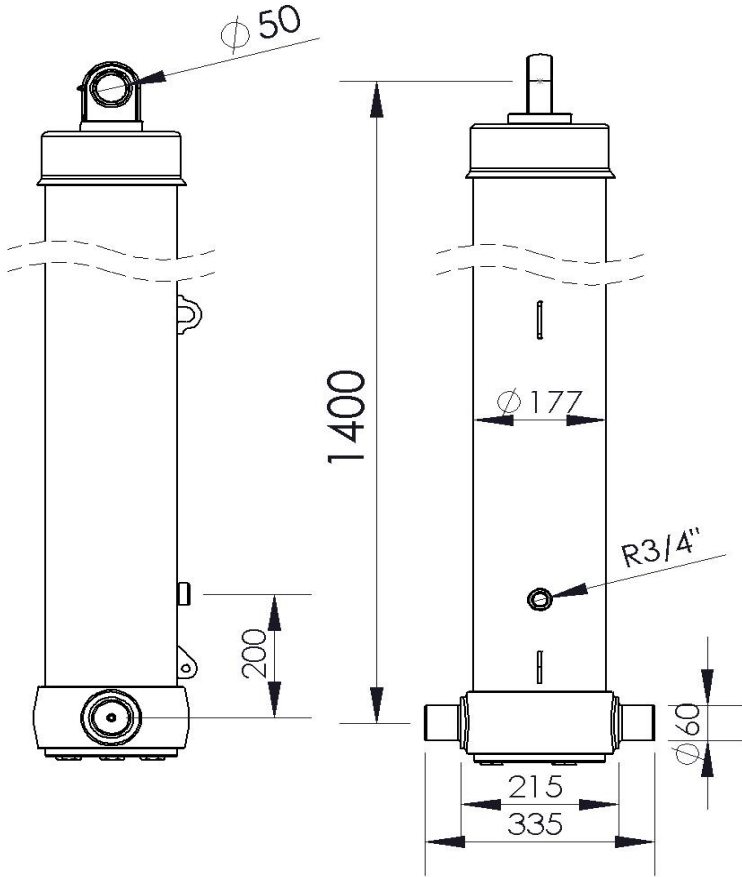

**TECHNICAL SPECIFICATIONS**



Working volume [lts]	67
Max.Working Pressure[bar]	250
Weight(cylinder)[kgs]	179
Min-Max.Cylinder Capacity [to]	45-58

Stage no	1	2	3	4	5	Total stroke
Ø Stage [mm]	Ø154,5	Ø135	Ø116	Ø98		
Stroke [mm]	1110	1110	1110	1110		4440

This cylinder is used to lift up dampers that is loaded different materials,loads must be centerised.

Cylinders should not be used as a main structural purposes be subject to side loads.

Cylinder should be mounted regarding to the isntruction that are shown in technical design with working angle description.

Cylinder shouldnot have more than 29 degree angels to return backside.

Cylinder is a cold drawn,seamless tubes which is ST52,E355,DIN2391 BK+S,E10305-2 standart.

Each stage tubes that is chroame coated with 20 micron,should be protected against the paints and chemicals.

Working temperature is between -40 C and 100 C

Painted by qualified acyriclic materials.

Load capacity described by technical specifications.

Warranty is valid under the working principles and technical specification.

1.Organize Sanayi Bölgesi Budaközü Sokak 16/B ( KONYA) TURKEY

Tel +90 332 251 06 00-Fax +90 332 251 06 00

info@hydodomotiv.com.tr - www.hydodomotiv.com.tr

**TSEK 404**

**ISO 9001 : 2015**

**ISO16949-2016**

**ISO 10002:2004**



**ISO10002: 2018**

**ISO 9001: 2015**

**ISO 45001: 2018**

**ISO 14001: 2015**

